



# SOLACE


ZERO CLEARANCE DIRECT VENT GAS FIREPLACE

**Unit Illustrated:** Solace HBZDV4736N Direct Vent Fireplace, LOGF36 Fiber Split Oak Log Set, VLBIT4 Log Bits, HB47CVCK Designer Clean View Circulating Kit, HB47RRH Red Herringbone Brick Liner.


 marquis  
COLLECTION

**ACCESSORY OPTIONS**  
(LOG SET OR ROCK SET REQUIRED FOR EACH UNIT)

**LOG SETS**



**LOGF36**  
Fibre Split Oak  
(SOLACE)



**MLOGC45**  
Burnt Oak  
(SOLACE II)




**MQROCK2**  
Natural  
Rock Set




**MQROCK3**  
Multi-Colored  
Rock Set

**ROCKS**  
SUPPORT PLATFORM  
REQUIRED – SOLACE ONLY


**LINERS**




**PL**  
Porcelain  
Reflective Liner



**RLH**  
Herringbone  
Brick Liner



**RRH Red**  
Herringbone  
Brick Liner



**RLT**  
Traditional  
Brick Liner

**REMOTE CONTROLS**

On/Off, Thermostat On/Off or Thermostat  
with Flame Modulating and or Fan Control



**PF1**  
OR MV



**GFRC,**  
PF1 OR MV

**THERMOSTATS**

Wall Mount Thermostat  
or Programmable Thermostat



# Find Your **SOLACE II**

Imagine lively gatherings or times of quiet reflection in front of the beautiful Solace II. Available in two sizes, the Solace II allows you to transform your fireplace into something truly unique.

With so much style and attention to detail, the Solace II is available in a range of sizes and styles. You can choose from our mid-efficient rated fireplace for ambiance and taking the chill out of the room, or our higher-efficient version for additional warmth.

Visit [www.marquisfireplaces.net](http://www.marquisfireplaces.net) to see the latest evolution in fireplaces.



## STANDARD FEATURES

- Millivolt or IPI valve system allows operation during a power failure with Hi/Low heat and flame adjustment
- Dual burner with Realistic Flame Pattern
- Safety Screen Barrier

## OPTIONAL FEATURES

### Designer Clean View Circulating Kit:

No Louvers Required

### Louvers:

Grills available in Black

### Fan Kit:

Heat activated with variable speed control

### Accessories:

Log sets or rock sets required

### Liners:

Porcelain Reflective Liner or Brick Liners




## SOLACE

Model	MQHBZDV3636N/NE	MQHBZDV3636LP/LPE	MQHBZDV4236N/NE	MQHBZDV4236LP/LPE	HBZDV4736N/NE	HBZDV4736LP/LPE
<b>Flue</b>	Top	Top	Top	Top	Top	Top
<b>Fuel</b>	Natural	Propane	Natural	Propane	Natural	Propane
<b>Input Max.</b>	30,500 BTU	29,000 BTU	30,500 BTU	29,000 BTU	40,000 BTU	36,000 BTU
<b>Input Min.</b>	20,600 BTU	22,200 BTU	20,600 BTU	22,200 BTU	27,000 BTU	30,000 BTU
<b>FE (P.4.1-15)</b>	61.98% / 63.92%	67.63% / 69.25%	61.98% / 63.92%	67.63% / 69.25%	60.39% / 61.88%	53.79% / 54.9%
<b>Log Set</b>	LOGF36	LOGF36	LOGF36	LOGF36	LOGF36	LOGF36

## SOLACE II

Model	HBZDV3624N/NE	HBZDV3624LP/LPE	HBZDV4224N/NE	HBZDV4224LP/LPE
<b>Flue</b>	Top	Top	Top	Top
<b>Fuel</b>	Natural	Propane	Natural	Propane
<b>Input Max.</b>	24,000 BTU	22,000 BTU	24,000 BTU	22,000 BTU
<b>Input Min.</b>	14,000 BTU	15,000 BTU	14,000 BTU	15,000 BTU
<b>FE (P.4.1-15)</b>	50.48% / 52.3%	52.59% / 54.24%	55.69% / 57.81%	57.03% / 59.09%
<b>Log Set</b>	MQLOGC45	MQLOGC45	MQLOGC45	MQLOGC45

TOP FLUE MODEL	Height		Front Width		Depth	
	Actual	Framing	Actual	Framing	Actual	Framing
<b>LOUVERS</b>						
<b>HBZDV36</b>	34 13/16"	35"	36"	36 3/8"	16 7/16"	17"
<b>HBZDV42</b>	37"	37 3/8"	41 7/8"	42 3/8"	16 7/16"	17"
<b>HBZDV47</b>	43 1/16"	43 1/8"	47 1/16"	47 3/8"	19 7/16"	19 1/2"
<b>CLEAN VIEW CIRCULATING KIT</b>						
<b>HBZDV36</b>	34 1/16"	41"	38 1/16"	38 7/16"	18 7/8"	19 1/2"
<b>HBZDV42</b>	36 13/16"	43"	42 1/16"	42 7/16"	18 15/16"	19 1/2"
<b>HBZDV47</b>	49"	49 1/8"	48 1/16"	48 3/8"	21 15/16"	22"

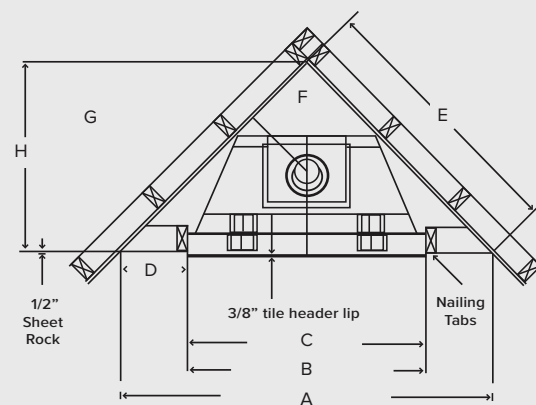

### TOP FLUE MODEL VIEWING AREA

	Width	Height
<b>HBZDV36</b>	29 3/4"	18 5/8"
<b>HBZDV42</b>	33 3/8"	20 3/8"
<b>HBZDV47</b>	39 1/2"	26 3/8"

### CORNER FRAMING DIMENSIONS (INCHES): LOUVERED UNITS

	HBZDV36	HBZDV42	HBZDV47
<b>A</b>	54 13/16"	58 13/16"	65 1/4"
<b>B</b>	36 3/8"	42 3/8"	47 3/8"
<b>C</b>	36"	41 7/8"	47 1/16"
<b>D</b>	9 3/16"	8 1/4"	8 15/16"
<b>E</b>	38 3/4"	41 5/8"	46 1/8"
<b>F</b>	12 3/8"	13 3/4"	13 15/16"
<b>G</b>	17 9/16"	19 1/2"	19 1/16"
<b>H</b>	27 3/8"	29 7/16"	32 5/8"

### CORNER FRAMING DIMENSIONS (INCHES): CLEAN VIEW CIRCULATING KIT (CVK)

	HBZDV36	HBZDV42	HBZDV47
<b>A</b>	59 7/8"	63 13/16"	70 3/16"
<b>B</b>	38 7/16"	42 7/16"	48 3/8"
<b>C</b>	38 1/8"	42 1/16"	48 1/16"
<b>D</b>	10 1/16"	10 1/16"	10 7/8"
<b>E</b>	42 5/16"	45 1/8"	49 5/8"
<b>F</b>	12 3/8"	13 3/4"	13 15/16"
<b>G</b>	17 9/16"	19 1/2"	19 1/16"
<b>H</b>	29 5/16"	31 7/8"	35 1/16"

**Unit Illustrated:** Solace MQHBZDV4236N  
Direct Vent Fireplace, LOGF36 Fiber  
Split Oak Log Set, HB42GBL Black Grills,  
HB42RLT Traditional Brick Liner.



Marquis Fireplaces maintains a program of continuous testing, refinement and improvements of all its products. Some aspect of units shown here may be changed at any time without notice or obligation.

Certified to: ANSI Z21.88-2017 • CSA 2.33-2017 Vented Gas Fireplace Heaters, CSA 2.17-2017

Note: Components may have to be ordered separately to create a complete unit. Discuss with your local Marquis Dealer for clarification.

Canada

**ENERGUIDE**

Look for the **ENERGUIDE**  
Gas Fireplace Energy  
Efficiency Rating in this brochure

Based on CSA P.4.1-15



**FOR CALIFORNIA RESIDENTS ONLY:**  
**WARNING!** This product can expose you to chemicals including Carbon Monoxide, that is an externally vented by-product of fuel consumption, which is [are] known to the State of California to cause birth defects or other reproductive harm. For more information, visit [www.P65Warnings.ca.gov](http://www.P65Warnings.ca.gov).

Crafted entirely in Canada, each Marquis fireplace is built to the highest standards and made to last.

**LIMITED LIFETIME WARRANTY**



2340 Logan Avenue  
Winnipeg, Manitoba, CAN  
R2R 2V3  
Phone: 204.632.1962  
Fax: 204.632.1960  
[marquisfireplaces.net](http://marquisfireplaces.net)

Printed in Canada  
B057 - 02/2020