



Unit Illustrated: Model ZCV39NHE2 Zero Clearance Direct Vent Gas Fireplace Natural Gas, MQLOGF9 Log Set, ZCV39RLH Herringbone Brick Liner, MQ39DD2BL Designer Door (Series 2) Black c/w Safety Screen.

BENTLEY

ZERO CLEARANCE DIRECT VENT GAS FIREPLACE

 marquis
COLLECTION

Bring the BIG VIEW INDOORS

With an expansive glass viewing area and clever designer options for customizing the look to suit your personal style, the **Bentley** by Marquis is generating some serious attention.

Available in a range of sizes and styles, you can choose from our mid efficient rated fireplace for ambiance and taking the chill out of the room, or higher efficient version for additional warmth.

With so much style and attention to detail, it's no wonder people are focused on the view indoors!

Visit marquisfireplaces.net to see the latest evolution in fireplaces.

BENTLEY

STANDARD FEATURES

- Dedicated Clean View appliance
- Millivolt or IPI valve system allows operation during a power failure with Hi/Low heat and flame adjustment
- Safety Screen Barrier
- Proflame II (PF2) Models include Remote Control: features flame, fan, thermostat, smart thermostat (WIFI Compatibility*); Bentley 34/48 (P2) models include accent lighting
** Smartphone (local WIFI only)*

OPTIONAL FEATURES

Fan Kit:

Heat activated with variable speed control

Designer Doors:

Arch, Straight Black (2 options) – Bentley 39/42/48 only

Surrounds:

Hearth Mount, Picture Frame, or Slim Line Picture Frame

Liners:

Porcelain Reflective, Fluted or Brick

Media Options:

Contemporary Rocks (2 options), Driftwood Set (2 options), Decorative Stones, Decorative Ember Glass (Glacier Ice, Cobalt Blue, Black, Bronze, White), Ember Chunks or Multi-Colored Cannonballs

Log Sets:

Choose from a selection of Oak, Birch, or Driftwood Log Sets

Accent Lighting:

For use with the Glass Tray – Bentley 39/42 models only *(Dealer Installed Item)*

Remote Controls (Millivolt or IPI PF1):

Thermostat on/off, thermostat on/off modulating, thermostat on/off modulating and fan control

Thermostats:

Wall mount or programmable

Vented Chase:

Front grill or side grills



Find all
detailed
Bentley
manuals:



Unit Illustrated: Model ZCV39NHE Zero Clearance Direct Vent Gas Fireplace Natural Gas, MQLOGF39BW Birch Wood Log Set, ZCV39PL Porcelain Reflective Liner, ZCV39S1PFBL Surround (Picture Frame 4" Wide).




COOL TOUCH WALL TECHNOLOGY OPTIONS

The chase of the appliance may be vented to achieve Cool Touch Walls or reduced Mantel Clearances.


Benefits to Cool Touch Wall Technology :

- Wall above fireplace will be cooler, useful when installing TV's or Artwork above fireplace.
- In some instances combustible materials can be used to cover the face of the fireplace (please consult installation manual).
- Mantel height is lower than Non-Vented Chase.
- Chase must be vented at the top with a specified grill or opening size.
- If the chase bumps out into the room, side grills can be installed on each side of the chase.

FRAMED COOL TOUCH WALL TECHNOLOGY*

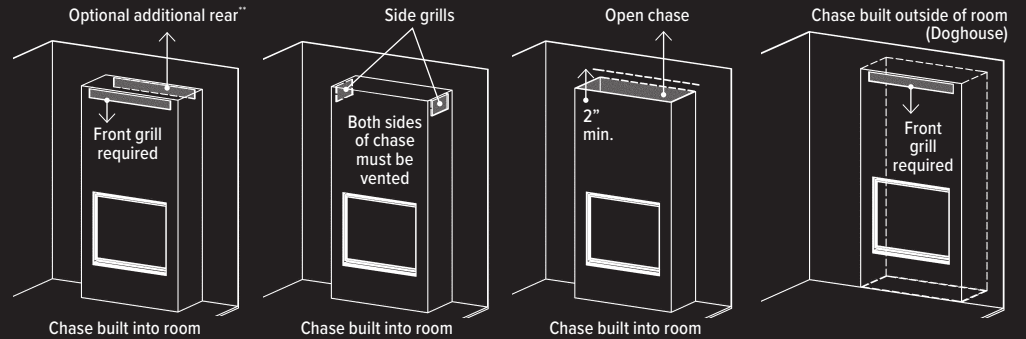

RECESSED COOL TOUCH WALL TECHNOLOGY OPTION*

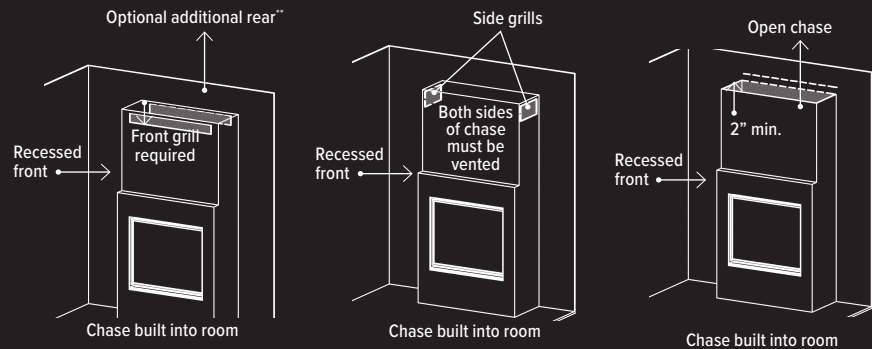

* **NOTE: Ventilation Plates are removed from fireplace before it is installed into a Vented Chase.**
** Consult manual for further information.

Minimum enclosure height for a vented chase is measured from bottom of fireplace, ventilation of minimum free air opening is required. Choose between our Enclosure Grills (Front or Sides) for adequate ventilation opening as stated in the manual. Grill or opening must meet minimum (as specified in the installation manual) of chase top/ceiling.


	ZCV34	ZCV39	ZCV42	ZCV48
MINIMUM ENCLOSURE HEIGHTS				
Min. Enclosure Height (Natural Gas)	68"	72"	72"	72"
Min. Enclosure Height (Propane)	68"	72"	72"	80"
WITH OPENINGS (NO GRILLS) – Minimum of 2" opening on all three sides of chase from ceiling				
WITH GRILLS (MIN. AIR FREE OPENINGS)				
Minimum Front Grill Opening	31 3/8" x 3 1/4"	36 1/2 x 3 5/8	36 1/2 x 3 5/8	48 1/2" x 4 7/8"
Minimum Grill Opening (Two Side Grills)	10 1/4" x 4 13/16"	12 1/2" x 6 1/8"	12 1/2" x 6 1/8"	15 1/4" x 6 5/8"
Grill Opening (Max. distance from top of enclosure)	3/4"	3/4"	3/4"	3/4"
Front Grill Part Number	V34EG	V39EG	V39EG	V49EG
Side Grills Part Number	V34EGS	V39EGS	V39EGS	VL60EGS

BENTLEY 34



Unit Illustrated: ZCV34NE2 Zero Clearance Direct Vent Natural Gas Fireplace, ZCV34RLH Herringbone Brick Liner, MQLOGF34OAK Oak Log Set.

BENTLEY 34 PRODUCT DIMENSIONS

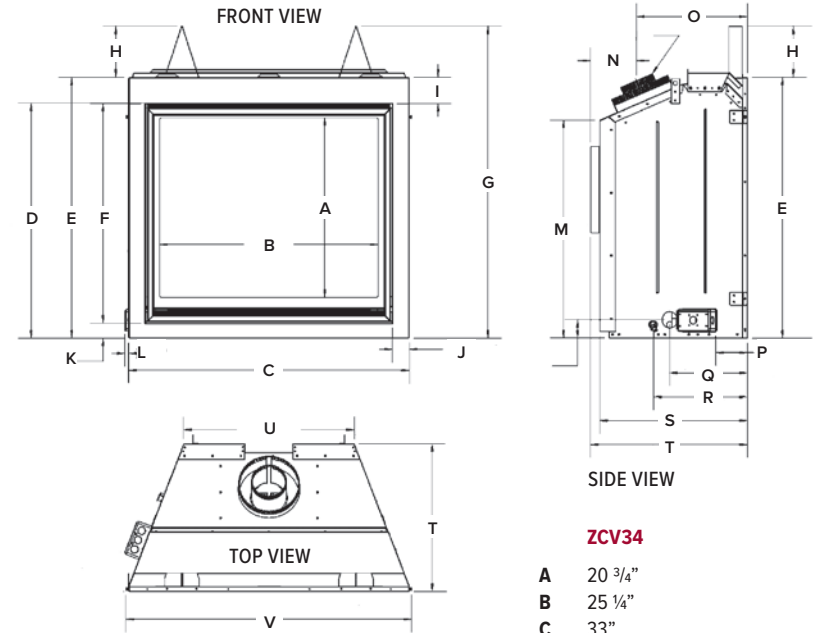

FRAMING DIMENSIONS

ZCV34

HEIGHT	
Actual	36"
Framing	36 1/8"
FRONT WIDTH	
Actual	33"
Framing	33 1/4"
DEPTH	
Actual	18 1/16"
Framing	18 1/8"***

*** Dependent of finishing material used

ZCV34

A	20 3/4"
B	25 1/4"
C	33"
D	27 1/8"
E	30 1/8"
F	25 5/16"
G	36"
H	5 7/8"
I	3 1/16"
J	1 15/16"
K	1 3/4"
L	7/16"
M	25 3/16"
N	5 1/4"
O	12 13/16"
P	3 1/16"
Q	8 5/16"
R	10 13/16"
S	17 1/16"
T	18 1/16"
U	19 11/16"
V	33"

SURROUNDS

	HEARTH MOUNT (3" WIDE)	PICTURE FRAME (4" WIDE)	PICTURE FRAME (1 1/16" WIDE)
ZCV34	ZCV34S1BL 34 7/8" W x 30 3/4" H	ZCV34S1PF 36 5/8" W x 33 3/8" H	ZCV34S2PF 31 1/16" W x 28 3/4" H



Unit Illustrated: ZCV34NE2 Zero Clearance Direct Vent Natural Gas Fireplace, MQLOGF34BW Birch Log Set, ZCV34RLT Traditional Brick Liner.



ZCV34NE2 Zero Clearance Direct Vent Natural Gas Fireplace, MQRBD3 Driftwood Log Set, ZCV34PL Porcelain Reflective Liner.



ZCV34NE2 Zero Clearance Direct Vent Natural Gas Fireplace, MQLOG453 Driftwood Log Set, ZCV34PL Porcelain Reflective Liner.



ZCV34NE2 Zero Clearance Direct Vent Natural Gas Fireplace, MQG5B Glass Media (Black, 5 lbs. x 2 Bags), ZCV34PL Porcelain Reflective Liner.



ZCV34NE2 Zero Clearance Direct Vent Natural Gas Fireplace, MQROCK3 Multi-Colored Rock Set, ZCV34PL Porcelain Reflective Liner.

BENTLEY 34 PRODUCT SPECIFICATIONS

MODEL	ZCV34N ZCV34NE ZCV34NE2	ZCV34LP ZCV34LPE ZCV34LPE2	ZCV34NH ZCV34NHE ZCV34NHE2	ZCV34LPH ZCV34LPHE ZCV34LPHE2
Fuel	Natural Gas	Propane	Natural Gas	Propane
Gas Control	Millivolt / IPI	Millivolt / IPI	Millivolt / IPI	Millivolt / IPI
Input Max.	19,000 BTU	18,000 BTU	19,000 BTU	18,000 BTU
Input Min.	13,500 BTU	14,000 BTU	13,500 BTU	14,000 BTU
FE (P.4.1-15)	53.49% / 56.14%	58.67% / 61.17%	63.25% / 66.45%	66.38% / 69.25%
Viewing Area	28 5/8" W x 25 3/8" H	28 5/8" W x 25 3/8" H	28 5/8" W x 25 3/8" H	28 5/8" W x 25 3/8" H
Venting	4"/7" Flex or 4" x 6 5/8" Hard Pipe* or Power Vent	4"/7" Flex or 4" x 6 5/8" Hard Pipe* or Power Vent	4"/7" Flex or 4" x 6 5/8" Hard Pipe* or Power Vent	4"/7" Flex or 4" x 6 5/8" Hard Pipe* or Power Vent
Cool Touch Walls	Vented Chase Option**	Vented Chase Option**	Vented Chase Option**	Vented Chase Option**

* Approved with Kingsman Flex Vent, MG DuraVent-Direct Vent Pro Direct Vent System, Amerivent Direct Vent Pipe System, Selkirk Direct-Temp Venting, ICC Excel Direct Vent, BDM Pro-Form Direct Vent and Metal Fab Sure-Seal DV Pipe System. This appliance is approved with Kingsman (PVH58) Horizontal Power Vent Termination.
 ** See Installation Manual for Vented Chase Option.



Unit Illustrated: ZCV34NE2 Zero Clearance Direct Vent Natural Gas Fireplace, MQSTONE Decorative Stones, ZCV34PL Porcelain Reflective Liner.

BENTLEY 39/42

BENTLEY 39 PRODUCT SPECIFICATIONS

MODEL	ZCV39N ZCV39NE ZCV39NE2	ZCV39LP ZCV39LPE ZCV39LPE2	ZCV39NH ZCV39NHE ZCV39NHE2	ZCV39LPH ZCV39LPHE ZCV39LPHE2
Fuel	Natural Gas	Propane	Natural Gas	Propane
Gas Control	Millivolt / IPI	Millivolt / IPI	Millivolt / IPI	Millivolt / IPI
Input Max.	25,000 BTU	25,000 BTU	28,000 BTU	29,000 BTU
Input Min.	16,750 BTU	20,000 BTU	19,000 BTU	23,000 BTU
FE (P.4.1-15)	52.35% / 52.24%	52.35% / 54.24%	63.81% / 66.17%	66.82% / 68.65%
Viewing Area	33"W x 28 5/8"H	33"W x 28 5/8"H	33"W x 28 5/8"H	33"W x 28 5/8"H
Venting	4"/7" Flex or 4" x 6 5/8" Hard Pipe* or Power Vent	4"/7" Flex or 4" x 6 5/8" Hard Pipe* or Power Vent	4"/7" Flex or 4" x 6 5/8" Hard Pipe* or Power Vent	4"/7" Flex or 4" x 6 5/8" Hard Pipe* or Power Vent

**Approved with Kingsman Flex Vent, MG Duravent-Direct Vent Pro Direct Vent System, Amerivent Direct Vent Pipe System, Selkirk Direct-Temp Venting, ICC Excel Direct Vent, BDM Pro-Form Direct Vent and Metal Fab Sure-Seal DV Pipe System. This appliance is approved with Kingsman (PVH58) Horizontal Power Vent Termination.*



ZCV39NE, MQLOGF9 Log Set, ZCV39RLS Stacked Brick Liner, MQ39DD2BL Designer Door (Series 2, Black).



ZCV39NE, MQLOGF9 Log Set, ZCV39RLT Traditional Brick Liner, MQ39DD3BL Designer Door (Series 3, Black)



ZCV39NE, LOGF3 Log Set, ZCV39RLH Herringbone Brick Liner, MQ39DD1BL Designer Door (Series 1, Black).



ZCV39NE, ZCV39GT Glass Tray, MQSTONE Decorative Stones, ZCV39PL Porcelain Reflective Panel Liner.




ZCV39NE, ZCV39GT Glass Tray, MQ39D Driftwood Log Set, MQSTONE Decorative Stones, VLBIT6 Log Bits (Small, 6 Piece Kit), ZCV39PL Porcelain Reflective Panel Liner.




ZCV39NE, ZCV39GT Glass Tray, MQROCK3 Contemporary Rock Collection (Multi-Colored), ZCV39PL Porcelain Reflective Panel Liner.

Unit Illustrated: Model ZCV39NE Zero Clearance Direct Vent Gas Fireplace Natural Gas, ZCV39GT Glass Tray, MQG5ZG ZIRCON Glacier Ice Glass Media (5 lbs. x 3 Bags), ULK2 Universal Light Kit (2 Lamps), ZCV39PL Porcelain Reflective Liner, ZCV39S2PFBL Surround (Picture Frame 1-5/8" Wide).

BENTLEY 39/42 PRODUCT DIMENSIONS

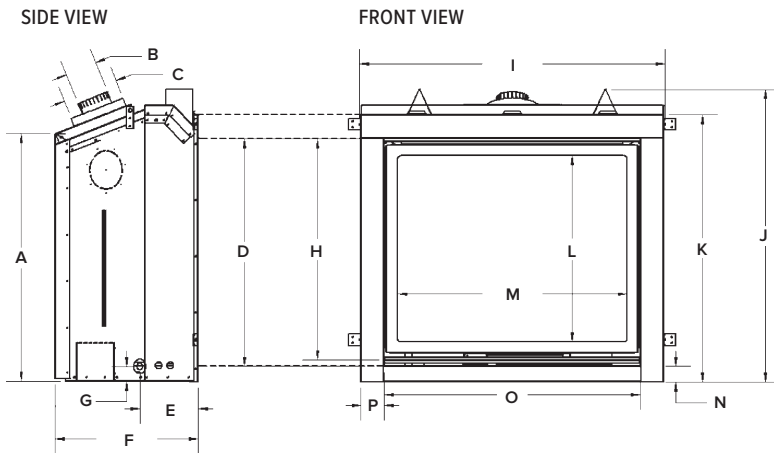

	ZCV39	ZCV42
A	32"	35 1/8"
B	4"	4"
C	7"	7"
D	29 3/8"	32 1/2"
E	7 1/2"	7 9/16"
F	18 7/16"	18 7/16"
G	1 15/16"	1 15/16"
H	28 9/16"	31 11/16"
I	39 3/8"	42 7/16"
J	37 11/16"	40 7/8"
K	34 1/2"	37 5/8"
L	24 1/16"	27 3/16"
M	29 5/8"	33 11/16"
N	2"	2"
O	33"	37 1/16"
P	3"	2 1/2"
Q	24 1/4"	27 7/8"
R	18 7/16"	18 7/16"
S	6 7/8"	6 7/8"
T	39 3/8"	42 7/16"

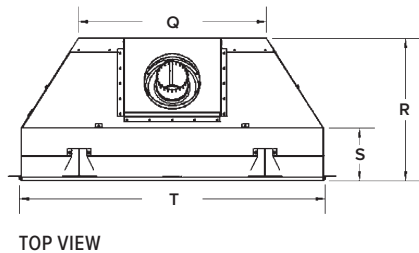

FRAMING DIMENSIONS

	ZCV39	ZCV42
HEIGHT		
Actual	37 11/16"	40 7/8"
Framing	37 7/8"	41"
FRONT WIDTH		
Actual	39 3/8"	42 7/16"
Framing	39 1/2"	42 1/2"
DEPTH		
Actual	18 7/16"	18 7/16"
Framing	18 1/2"***	18 1/2"***

***Dependent of finishing material used

SURROUNDS

	HEARTH MOUNT (4" WIDE)	PICTURE FRAME (4" WIDE)	PICTURE FRAME (1 5/8" WIDE)
ZCV39	ZCV39S1BL 40 5/8" W x 35" H	ZCV39S1PFBL 40 5/8" W x 37" H	ZCV39S2PFBL 36 1/8" W x 32 1/2" H
ZCV42	ZCV42S1BL 44 11/16" W x 38 1/8" H	ZCV42S1PFBL 44 11/16" W x 40 1/8" H	ZCV42S2PFBL 40 3/16" W x 35 5/8" H

BENTLEY 42 PRODUCT SPECIFICATIONS

MODEL	ZCV42N ZCV42NE ZCV42NE2	ZCV42LP ZCV42LPE ZCV42LPE2	ZCV42NH ZCV42NHE ZCV42NHE2	ZCV42LPH ZCV42LPHE ZCV42LPHE2
Fuel	Natural Gas	Propane	Natural Gas	Propane
Gas Control	Millivolt / IPI	Millivolt / IPI	Millivolt / IPI	Millivolt / IPI
Input Max.	25,000 BTU	25,000 BTU	29,500 BTU	29,000 BTU
Input Min.	16,500 BTU	19,500 BTU	20,000 BTU	23,000 BTU
FE (P.4.1-15)	52.86% / 54.95%	52.86% / 54.95%	64.53% / 66.48%	66.65% / 68.77%
Viewing Area	37 1/8"W x 31 3/4"H	37 1/8"W x 31 3/4"H	37 1/8"W x 31 3/4"H	37 1/8"W x 31 3/4"H
Venting	4"/7" Flex or 4" x 6 5/8" Hard Pipe* or Power Vent	4"/7" Flex or 4" x 6 5/8" Hard Pipe* or Power Vent	4"/7" Flex or 4" x 6 5/8" Hard Pipe* or Power Vent	4"/7" Flex or 4" x 6 5/8" Hard Pipe* or Power Vent

*Approved with Kingsman Flex Vent, MG Duravent-Direct Vent Pro Direct Vent System, Amerivent Direct Vent Pipe System, Selkirk Direct-Temp Venting, ICC Excel Direct Vent, BDM Pro-Form Direct Vent and Metal Fab Sure-Seal DV Pipe System. This appliance is approved with Kingsman (PVH58) Horizontal Power Vent Termination.

Unit Illustrated: ZCV42NE2, MQ42D Driftwood Log Set, ZCV42GT Glass Tray, ZCV42PL Porcelain Reflective Liner, ZCV42S1BL Surround (Hearth Mount 4" Wide).



BENTLEY 48

Go **BIG**

When the view is this big, it must be the **Bentley 48**. This big brother of the popular Bentley by Marquis is getting some serious attention and lots of second looks from home owners wanting to enjoy a statement fireplace. An expansive glass viewing area and beautiful designer options allow you to customize the look to your own style. Take the chill out of the room with this heater-rated fireplace, and bask in some serious warmth.


Wow – we made you look, didn't we?

Visit www.marquisfireplaces.net to see the latest evolution in fireplaces.



Unit Illustrated: MQZCV48NE2 Zero Clearance Direct Vent Natural Gas Fireplace, MQLOGF48B Burnt Oak Log Set, ZCV48RLH Herringbone Brick Liner.

BENTLEY 48 PRODUCT DIMENSIONS

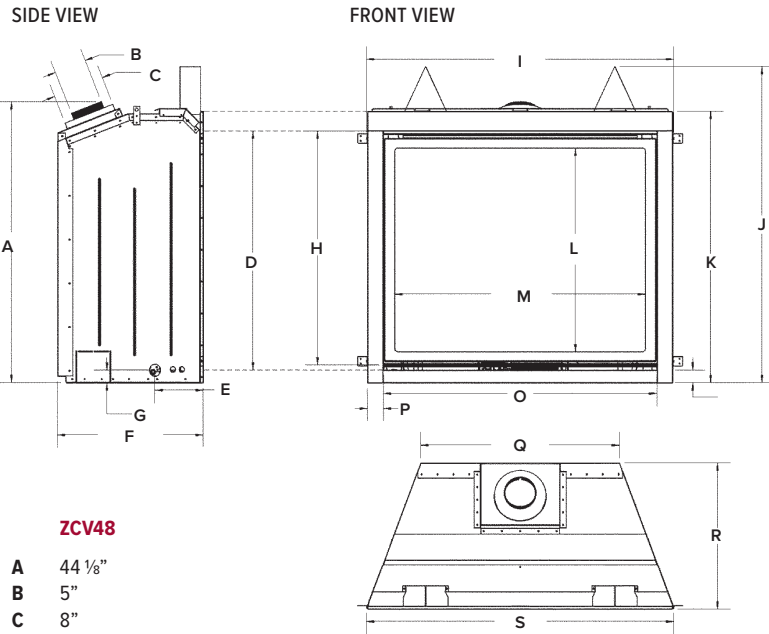

ZCV48

A	44 1/8"
B	5"
C	8"
D	37 9/16"
E	7 5/8"
F	22 15/16"
G	1 15/16"
H	36 3/4"
I	48 3/8"
J	49 11/16"
K	42 11/16"
L	32"
M	39 7/16"
N	2"
O	43"
P	2 1/2"
Q	31 5/16"
R	23"
S	48 3/8"

TOP VIEW

FRAMING DIMENSIONS

ZCV48

HEIGHT	
Actual	49 11/16"
Framing	49 3/4"
FRONT WIDTH	
Actual	48 3/8"
Framing	48 1/2"
DEPTH	
Actual	22 15/16"
Framing	24 9/16"***

***Dependent of finishing material used

SURROUNDS

HEARTH MOUNT (4" WIDE)

ZCV48	ZCV48S1BL
50 9/16" W x 43 3/16" H	

BENTLEY 48 PRODUCT SPECIFICATIONS

MODEL	MQZCV48N	MQZCV48LP	MQZCV48NE MQZCV48NE2	MQZCV48LPE MQZCV48LPE2
Fuel	Natural Gas	Propane	Natural Gas	Propane
Gas Control	Millivolt	Millivolt	IPI	IPI
Input Max.	42,500 BTU	42,250 BTU	42,500 BTU	42,250 BTU
Input Min.	28,500 BTU	34,000 BTU	28,500 BTU	34,000 BTU
FE (P.4.1-15)	52.24%	54.52%	53.37%	55.71%
Viewing Area	43" W x 36 3/4" H	43" W x 36 3/4" H	43" W x 36 3/4" H	43" W x 36 3/4" H
Venting	5/8" Hard Pipe* or Power Vent	5/8" Hard Pipe* or Power Vent	5/8" Hard Pipe* or Power Vent	5/8" Hard Pipe* or Power Vent

*Approved with Kingsman Flex Vent, MG DuraVent-Direct Vent Pro Direct Vent System, Amerivent Direct Vent Pipe System, Selkirk Direct-Temp Venting. ICC Excel Direct Vent, BDM Pro-Form Direct Vent and Metal Fab Sure-Seal DV Pipe System. This appliance is approved with Kingsman (PVH58) Horizontal Power Vent Termination.



MQZCV48NE2 Zero Clearance Direct Vent Natural Gas Fireplace, MQZCV48GT Glass Tray, MQG5C Bronze Glass Media (x5), ZCV48PL Porcelain Liner.



MQZCV48NE2 Zero Clearance Direct Vent Natural Gas Fireplace, MQLOGF48 Oak Log Set, ZCV48RLS Stacked Brick Liner, and MQ48DD3BL Designer Arch Door (Series 3).

Unit Illustrated: MQZCV48NE2 Zero Clearance Direct Vent Natural Gas Fireplace, MQLOGF39BW Birch Log Set, with MQBBITS Birch Log Bit Kit, ZCV48RLS Stacked Brick Liner.



BENTLEY ACCESSORIES

LOG SETS



MQRBD3
Driftwood Set
BENTLEY 34



MQRBRW
Birch Log Set
BENTLEY 34



MQLOGF34OAK
Oak Log Set
BENTLEY 34



MQLOGF34BW
Birch Log Set
BENTLEY 34



MQLOGF453
Driftwood Log Set
BENTLEY 34



LOGC44
Burnt Oak Log Set
BENTLEY 34



MQLOGF9
Split Oak Log Set
BENTLEY 39 / 42



LOGF3
Split Oak Log Set
BENTLEY 39 / 42



MQ39D Driftwood Log Set
(Glass Tray Required)
BENTLEY 39 / 42



MQLOGF39BW
Birch Log Set
BENTLEY 39 / 42 / 48



MQ42D Driftwood Log Set
(Glass Tray Required)
BENTLEY 39 / 42



MQLOGF48D Driftwood
Log Set (Glass Tray Required)
BENTLEY 48



MQLOGF48
Split Oak Log Set
BENTLEY 48



MQLOGF48B
Burnt Oak Log Set
BENTLEY 48

LINERS



Red Herringbone
Brick Liner (RRH)
BENTLEY 39 / 42



Herringbone
Brick Liner (RLH)
BENTLEY 34 / 39 / 42 / 48



Stacked Brick
Liner (RLS)
BENTLEY 39 / 42 / 48



Fluted
Liner (RLF)
BENTLEY 39 / 42 / 48




Traditional Brick
Liner (RLT)
BENTLEY 34 / 39 / 42 / 48




Porcelain Reflective
Liner (PL)
BENTLEY 34 / 39 / 42 / 48

WALL SURROUND

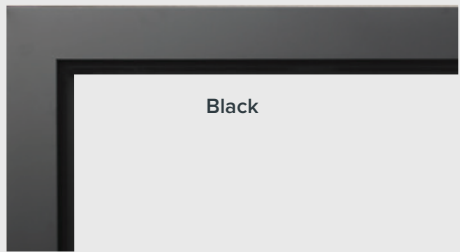

Black

DESIGNER DOORS FOR BENTLEY 39 / 42 / 48

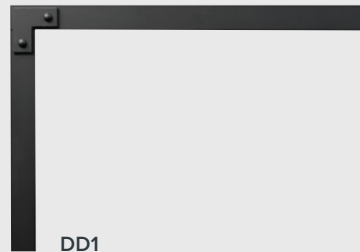

DD1



DD2



DD3

STONE MEDIA OPTIONS

(Glass Tray Required)



MQEMBER
Ember Chunks



MQSTONE
Decorative Stones



MQROCK2
Natural Rock Set



MQROCK3
Multi-Colored Rock Set



RBCB1
Multi-Colored Cannonballs

GLASS MEDIA OPTIONS

(Glass Tray Required)




MQG5ZG
Zircon Glacier Ice Glass



MQG5A
Cobalt Ember Glass



MQG5B
Black Ember Glass



MQG5C
Bronze Ember Glass



MQG5W
White Ember Glass



Unit Illustrated: MQZCV48NE2 Zero Clearance Direct Vent Natural Gas Fireplace, MQLOGF48D Driftwood Log Set, MQZCV48GT Glass Tray, MQSTONE10 Decorative Stone, MQZCV48RLF Fluted Brick Liner.



Marquis Fireplaces maintains a program of continuous testing, refinement and improvements of all its products. Some aspect of units shown here may be changed at any time without notice or obligation.

Certification: These Models are certified to ANSI Z21.88-2017 CSA 2.33-2017 Vented Gas Fireplace Heaters.

Note: Components may have to be ordered separately to create a complete unit. Discuss with your local Marquis Dealer for clarification.

Canada

ENERGUIDE

Look for the **EnerGuide** Gas Fireplace Energy Efficiency Rating in this brochure

Based on CSA P.4.1-15



FOR CALIFORNIA RESIDENTS ONLY:
WARNING! This product can expose you to chemicals including Carbon Monoxide, that is an externally vented by-product of fuel consumption, which is [are] known to the State of California to cause birth defects or other reproductive harm. For more information, visit www.P65Warnings.ca.gov.

Crafted entirely in Canada, each Marquis fireplace is built to the highest standards and made to last.

LIMITED LIFETIME WARRANTY



2340 Logan Avenue
Winnipeg, Manitoba, CAN
R2R 2V3
Phone: 204.632.1962
Fax: 204.632.1960
marquisfireplaces.net

Printed in Canada
B106 - 03/2024