

ZERO CLEARANCE DIRECT VENT BAY PENINSULA GAS FIREPLACE



CREATING A

Its wraparound view captivates from every angle. Luring you in with its three-dimensional sightlines, the **ENCLAVE** from Marguis creates a sleek and cleverly designed gathering point for the heart of your home.

Amazingly versatile, this beguiling fireplace adapts to suit any room with options for a Single Side, Corner or a Bay Peninsula. It transforms completely with your choice of fireplace liner and accessories that range from driftwood logs and contemporary rocks to cannonballs and glass.

With the ENCLAVE'S innovative vented chase technology you may now cover the fireplace with combustible materials up to the glass door opening.

Follow the instructions in the manual for venting the chase (opening above and below the appliance is required).

Visit marquisfireplaces.net to see the latest evolution in fireplaces.



ENCLAVE FEATURES

STANDARD

- Accent Lighting: Enclave 48/60/72 - LED Lighting (non-dimmable) Enclave 34 - Halogen Lighting
- Zero Clearances to TVs and Artwork
- Invisible Glass Safety Barrier
- · Proflame II Models include Remote Control with the following features: flame adjustment, thermostat, smart thermostat (WIFI Compatibility*) and accent lighting control





* Smartphone (local WIFI only)

BENEFITS OF OUR VENTED CHASE TECHNOLOGY

- No fans required to vent the chase, will work during power failures (batteries required)
- · Allows for all wood framing
- · Combustible materials may be used right up to the glass door opening
- · Seamless glass, removes the need for steel safety screen barrier
- Allows for reduced mantel clearances
- Ultra-low TV clearances

OPTIONAL

Surrounds:

Black or Stainless; Single-Sided Models only

Liners:

Enclave 48/60/72 - Reflective Glass, Fluted Brick, and Stacked Brick

Enclave 34 - Reflective Glass. Fluted and Traditional Brick

Media Options (Required):

Glass Media (Glacier Ice, Cobalt Blue, Black, Bronze, White)

Additional Media (Optional):

Cannonballs, Decorative Stones, Contemporary Rocks (natural and multi-colored), Ember Chunks

Log Sets:

Oak, Birch, and Driftwood Sets

Enclosure Grills:

Front or Sides - Unfinished

Corner Kit:

Available for Bay Peninsula Unit


Side Extension Panels:

Black; Single-Sided Models only

Heat Distribution System:

Plenum (Enclave 48 only)

Distribution System:



Find all detailed manuals:







MODELMQZCVBG34NE2MQZCVBG34LPE2TypeBAY PENINSULABAY PENINSULA

 Fuel
 Natural
 Propane

 Gas Control
 IPI PF2
 IPI PF2

 Input Max.
 25,000 BTU
 24,000 BTU

 Input Min.
 17,500 BTU
 19,000 BTU

Venting* 5"/8" 5/8"

Glass Size $33^{11/16}$ " W X 22" H $33^{11/16}$ " W X 22" H

 Glass Type
 Ceramic
 Ceramic

 FE (P.4.1-15)
 52.94%
 51.96%

Ventilation Required:

THE FIREPLACE CHASE MUST BE VENTED ABOVE THE APPLIANCE**

THIS UNIT CAN BE CONVERTED TO A CORNER INSTALLATION

*This appliance is approved for use with 5"/8" Kingsman Flex, M&G-Duravent Direct Vent system (Model DV-GS Series) and Snorkel, BDM Pro Form Direct Vent, Ameri-Vent Direct Vent Pipe System, ICC Excel Direct, Metal Fab Sure-Seal DV and Selkirk Direct Temp. When using ICC Excel Direct a one-foot section of 5"/8" MG Duravent must be used as a starter collar at the flue of the appliance.

**Consult Installation Manual for requirements and further clarification.

Unit Illustrated: Model MQZCVBG34NE2 Direct Vent Fireplace (Natural Gas), VL34EG Grill Kit for Enclosure, MQLOGF453 Driftwood Log Set, MQZCVBG34RGB Reflective Glass Liner (Back).

(Chase must be vented above appliance – consult manual for instructions).









ENCLAVE 48 ADJUSTABLE VENTED PLATFORMS

Save on framing and adjust platform to your required height. Height is variable from 15" to 27". Ventilation Slots are provided at the bottom and between the fireplace and the platform.



VL48AVP

- **A** 15" to 27"
- **B** 15"
- **C** 56"
- **D** 17 1/8"
- **E** 27"



NOTE: the fireplace chase must be vented both above and below appliance, no fans are required.





MQVLBG60NE2 Bay Peninsula Direct Vent Fireplace (Natural Gas), MQG5C Glass Media (Bronze x 3), MQLOGF48D Driftwood Log Set, MQSTONE10 Decorative Stone (10 PCE), MQVL60RLSB Stacked Brick Liner.



MQVLBG60NE2 Bay Peninsula Direct Vent Fireplace (Natural Gas), MQG5C Glass Media (Bronze x3), MQVL60RBG Reflective Glass Liner (Back).



MQVLBG60NE2 Bay Peninsula Direct Vent Fireplace (Natural Gas), MQG5C Glass Media (Bronze x 3), MQRBD3 Driftwood Log Set (5 PCE), MQSTONE10 Decorative Stones (10 PCE), MQVL60RLSB Stacked Brick Liner.

*This appliance is approved for use with 5"/8" Kingsman Flex, M&G-Duravent Direct Vent system (Model DV-GS Series) and Snorkel, BDM Pro Form Direct Vent, Ameri-Vent Direct Vent Pipe System, ICC Excel Direct, Metal Fab Sure-Seal DV and Selkirk Direct Temp. When using ICC Excel Direct a one-foot section of 5"/8" MG Duravent must be used as a starter collar at the flue of the appliance.

**Consult Installation Manual for requirements and further clarification.


MQVLBG60NE2 MQVLBG60LPE2 MQVL60NE2 MQVL60LPE2 **BAY PENINSULA BAY PENINSULA** SINGLE-SIDED SINGE-SIDED Type Fuel Natural Gas Propane **Natural Gas** Propane IPI PF2 IPI PF2 IPI PF2 IPI PF2 **Gas Control** Input Max. 45.000 BTU 44.000 BTU 45.000 BTU 44.000 BTU Input Min. 32,000 BTU 35,000 BTU 32.000 BTU 35,000 BTU Venting* 5"/8" 5"/8" 5"/8" 5"/8" Glass Size 61 1/32" W x 17 7/8" H 61 1/32" W x 17 1/8" H 61 1/32" W x 17 1/8" H 61 1/32" W x 17 1/8" H **Glass Type** Ceramic Ceramic Ceramic Ceramic FE (P.4.1-15) 56.18% 56.52% 56.18% 56.52%

Ventilation Required:

THE FIREPLACE
CHASE MUST
BE VENTED BOTH
ABOVE AND BELOW
APPLIANCE**


ABOVE the appliance: 200 sq./in.

BELOW the appliance: 102 sq./in.




ENCLAVE 60 ADJUSTABLE VENTED PLATFORMS

Save on framing and adjust platform to your required height. Height is variable from 15" to 27". Ventilation Slots are provided at the bottom and between the fireplace and the platform.

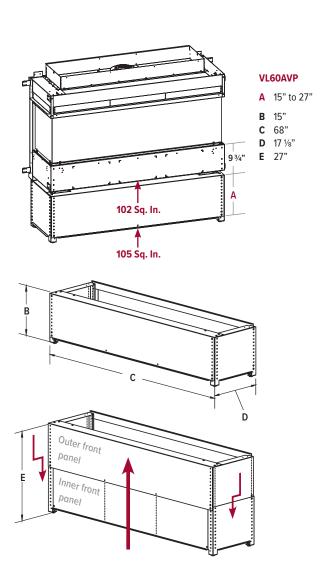


NOTE: the fireplace chase must be vented both above and below appliance, no fans are required.

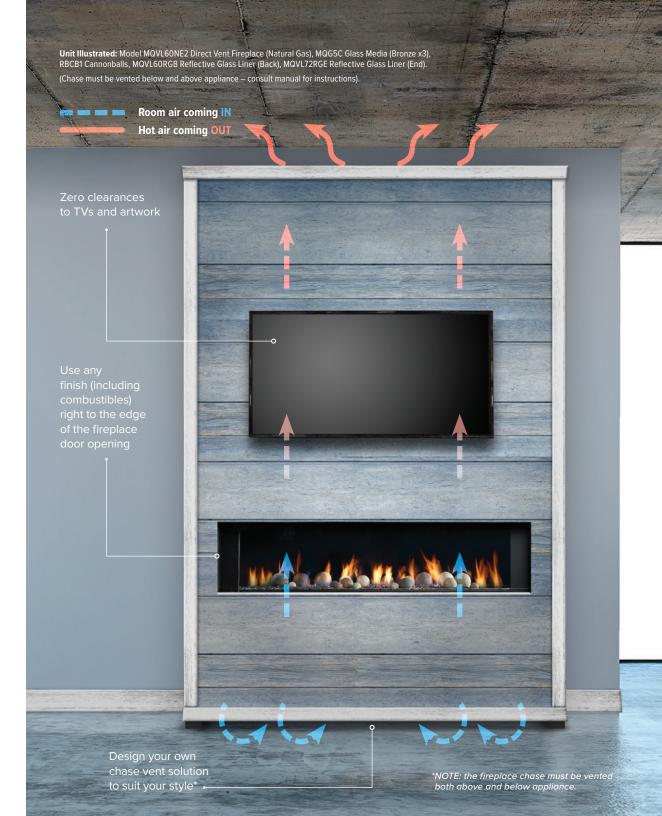




ENCLAVE 72 ADJUSTABLE VENTED PLATFORMS

Save on framing and adjust platform to your required height. Height is variable from 15" to 27". Ventilation Slots are provided at the bottom and between the fireplace and the platform.

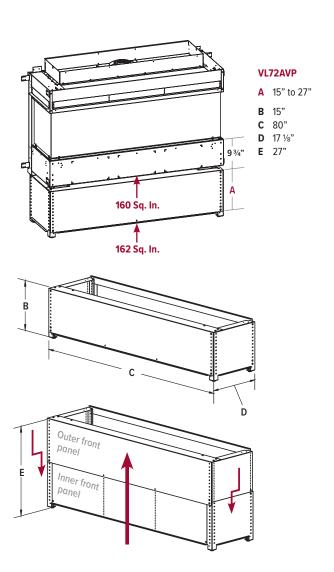

NOTE: the fireplace chase must be vented both above and below appliance, no fans are required.

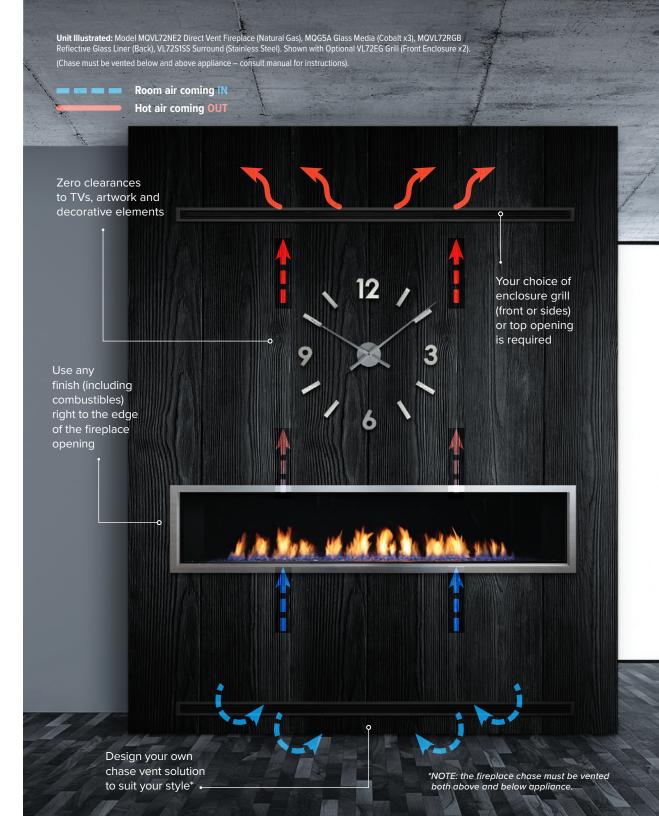


ENCLAVE PRODUCT SPECIFICATIONS


DIMENSIONS

MQVLBG34		:	MQVL48	MQVLBG48	M	QVL60	MQVLBG60	M	QVL72	MQVLBG72
Bay Peninsula		:	Single Side	Bay Peninsula	Si	ngle Side	Bay Peninsula	Si	ngle Side	Bay Peninsula
Α	16 7/16"	:	A 18 ¹³ / ₁₆ "	18 ¹³ / ₁₆ "	. A	20 1/16"	20 1/16"	A	18 ¹³ / ₁₆ "	18 %"
В	34 5/16"	:	B 56 ½"	56 ½"	В	68 ½"	68 1/2"	В	80 1/2"	80 1/2"
С	37 %"		C 36 ⁵ /16"	36 5/16"	С	36 5/16"	36 5/16"	С	36 5/16"	36 5/16"
D	34 %"	:	D 46 3/8"	46 3/8"	D	58 ½"	58 1/2"	D	70 ½"	70 ½"
Ε	34 1/8"	:	E 54 ¹⁵ / ₁₆ "	54 ¹⁵ / ₁₆ "	E	66 11/16"	66 %"	E	78 %"	78 ⁵ / ₈ "
F	21 1/2"	:	F 49 ½6"	49 1/16"	F	61 1/32"	61 1/32"	F	73 3/16"	73 3/16"
G	7 %16"		G 9 ¾"	9 3/4"	G	9 ¾"	9 3/4"	G	9 ¾"	9 3/4"
Н	20 15/16"	:	H 15 1⁄4"	15 1/4"	H	15 1/4"	15 1/4"	Н	15 1/4"	15 1/4"
Ι	9/16"		9/16"	_	1	11/16"	3/4"	1	11/16"	3/4"
J	3 1/2"		J 4"	4"	J	4"	4"	J	4"	4"
K	5 1/16"		K 7 5/16"	7 1/4"	K	7 5/16"	7 5/16"	K	7 5/8"	7 5/16"
L	4 1/16"		L 4 %16"	4 %16"	L	4 %16"	4 %16"	L	4 %16"	4 %16"
M	16 3/4"		M 18"	18"	M	18"	18"	М	18 %"	18 %"
N	37 5/8"	:	N 36 ¼"	36 1/4"	N	36 5/16"	36 5/16"	N	36 5/16"	36 ⁵ ⁄16"
0	_	:	0 81/4"	8 1/4"	0	8 1⁄4"	8 1/4"	0	8 1⁄4"	8 1/4"


TOP VIEW




SIDE VIEW - SINGLE SIDED




SIDE VIEW - BAY PENINSULA



FRONT VIEW




WALL SURROUND



VL-1031		VLUUSI	VL/231
Α	58 1/16"	70 1/16"	82 1/16"
В	18 ½"	18 1/2"	18 1/2"
С	1 1/2"	1 1/2"	11/2"
D	1 1/2"	11/2"	1 1/2"


SIDE EXTENSION PANELS

for 48/60/72 Single Side




CORNER KIT

34 Bay: ZCV34BGCK 48/60/72 Bay: VLBGCK




ENCLOSURE GRILL






FRONT/TOP VIEW - VL60EG/VL72EG




SIDE VIEW




VL	.34EG	VL48EG	VL60EG	VL72EG	
Α	32 5/16"	49 3/4"	61 3/4"	79 ¾"	
В	4 3/8"	4 13/16"	4 1/8"	4 1/8"	
С	31 3/16"	48 1/2"	60 1/2"	78 %"	
D	3 1/4"	3 1/2"	3 %"	3 1/8"	

SIDE ENCLOSURE GRILL (PAIR)

FRONT VIEW





VL	.34EGS	VL60EGS	VL72EGS	
Α	11 1/4"	16 ³/16"	16 ³/16"	
В	6"	7 %"	10 3/8"	
С	2 5/8"	2 1/8"	2 1/8"	
D	4 %16"	6 1/16"	8 15/16"	
Ε	10 ½"	15 1/16"	15 1/16"	
F	2 %"	2 %16"	2 1/8"	



LOG SETS



MQLOGF340AK (7-Piece)
Oak Log Set
ENCLAVE 34



MQLOGF34BW (7-Piece) Birch Log Set ENCLAVE 34



MQ42D (6-Piece) Driftwood Set ENCLAVE 34



MQLOGF453 (5-Piece)
Driftwood Set
ENCLAVE 34



MQ46D (3-Piece) Driftwood Set ENCLAVE 48/60/72



MQRBD1 (4-Piece)
Driftwood Set with 4 Rocks
ENCLAVE 48/60/72



MQRBD3 (5-Piece) / MQRBD4 (3-Piece)
Driftwood Set
ENCLAVE 34/48/60/72



MQLOGF48D (6-Piece)
Driftwood Set
ENCLAVE 48/60/72



MQRBD2 (3-Piece)
Driftwood Set
ENCLAVE 48/60/72



MQRBRW (5-Piece) Birch Log Set ENCLAVE 34/48/60/72

MEDIA OPTIONS



MQG5ZG Zircon Glacier Ice Glass



MQG5A Cobalt Ember Glass



MQG5B Black Ember Glass



MQG5C Bronze Ember Glass



MQG5W White Ember Glass



MQEMBER Ember Chunks



MQSTONE Decorative Stones



MQROCK2 Natural Rock Set



MQROCK3 Multi-Colored Rock Set



RBCB1
Multi-Colored Cannonballs

LINERS




Traditional Brick
ENCLAVE 34



Fluted
ENCLAVE 34/48/60/72



Stacked Brick ENCLAVE 48/60/72



Glass Reflective ENCLAVE 34/48/60/72





Marquis Fireplaces maintains a program of continuous testing, refinement and improvements of all its products. Some aspect of units shown here may be changed at any time without notice or obligation.

Certification: Certified to ANSI Z21.88-2017, CSA 2.33-2017 Vented Gas Fireplace Heaters.

Note: Components may have to be ordered separately to create a complete unit. Discuss with your local Marquis Dealer for clarification.

Canadä

ENER GUIDE

Look for the **EnerGuide** Gas Fireplace Energy Efficiency Rating in this brochure

Based on CSA P.4.1-15



★ FOR CALIFORNIA RESIDENTS ONLY:

to chemicals including Carbon Monoxide, that is an externally vented by-product of fuel consumption, which is [are] known to the State of California to cause birth defects or other reproductive harm. For more information, visit www.P65Warnings.ca.gov.

Crafted entirely in Canada, each Marquis fireplace is built to the highest standards and made to last.

LIMITED LIFETIME WARRANTY



2340 Logan Avenue Winnipeg, Manitoba, CAN R2R 2V3 Phone: 204.632.1962 Fax: 204.632.1960 marguisfireplaces.net

Printed in Canada B100 - 07/2023